

1008123020

TFIX-2

Ex IP Intercom Station



Turbine



IP66



IEC Ex Intercom



Atex



Active Noise Cancelling



IP over 2-wire

DESCRIPTION

- VoIP intercom for potentially explosive atmospheres Directive 94/9/EC
- Ethernet compatible 2-wire interface
- DIP functionality for use with AlphaCom audio servers
- SIP/VoIP functionality for use with 3rd-party systems
- Dust- and water-protected to IP66
- Monitoring and self-diagnostics of critical functionality
- Visible status indicators on front panel

The TFIX-2 Explosion-proof intercom station is a rugged device, designed for harsh environments and meets industrial and offshore requirements as well as requirements for ATEX Zone 1 operation. The plastic housing is designed to withstand most chemical and environmental hazards found on- or offshore.

The TFIX-2 features 6 programmable buttons.


The intercom station is fully digital and offers crystal clear audio with high output through an internal amplifier and 78 mm speaker, delivering over 90 dB SPL. Active Noise Reduction and Acoustic Echo Cancelling allows for hands-free two-way communication with superior audio quality.

Intercom status indicators display the status of the system and are compatible with AlphaCom and Exigo systems as well as SIP functionality for use with 3rd party systems.

SPECIFICATIONS

MECHANICAL	
Dimensions	345 x 178 x 101 mm
Weight	4 kg
Mounting	On-wall box (included)
Color	Black
ENVIRONMENTAL	
Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +70°C
Operating humidity	10% to 95% RH (non-condensing)
Storage humidity	10% to 95% RH (non-condensing)
Air pressure	600 hPa to 1200 hPa
IP-rating	IP64 in accordance with IEC 60079-0
	IP66 in accordance with EN 60945
IK rating	7J for enclosure
	4J for cable glands
ELECTRICAL	
PoE	NO, proprietary 2-wire data- and powerbus
Power consumption	4.2 W (idle) to 8 W (max)
DC power	24 VDC
NETWORK	
Connection	2 x 2-wire
Connection type	Screw terminals
Functions	Auto negotiating
Built-in switch	N/A
Compatibility	SIP, AlphaCom™, Pulse™, G.711, G.722, G.729, HD Voice
INPUTS AND OUTPUTS	
Handheld Microphone	Microphone (bal), PTT
Handset	Microphone (bal), Speaker (bal) + PTT
Headset	Microphone (bal), Speaker (bal), + PTT
Digital inputs/outputs	NO
Relay outputs	NO
Audio	Yes, for audio accessories
Aux power	Provided by network cable
CERTIFICATIONS	
Immunity	EN 60945, EN 61000-6-2
Emission	EN 60945, EN 61000-6-3, EN 61000-6-4
CENELEC safety standards	EN 60079-0: 2012, EN 60079-7: 2007, EN 60079-11: 2012, EN 60079-18: 2009
IEC safety standards	IEC 60079-0: 2011, IEC 60079-7: 2006-07, IEC 60079-11: 2011, IEC 60079-18: 2009
Marking	II 2(2) G Ex e ib mb [ib] IIC T4 Gb -20°C ≤ Ta ≤ +60°C

TECHNICAL DIMENSIONS

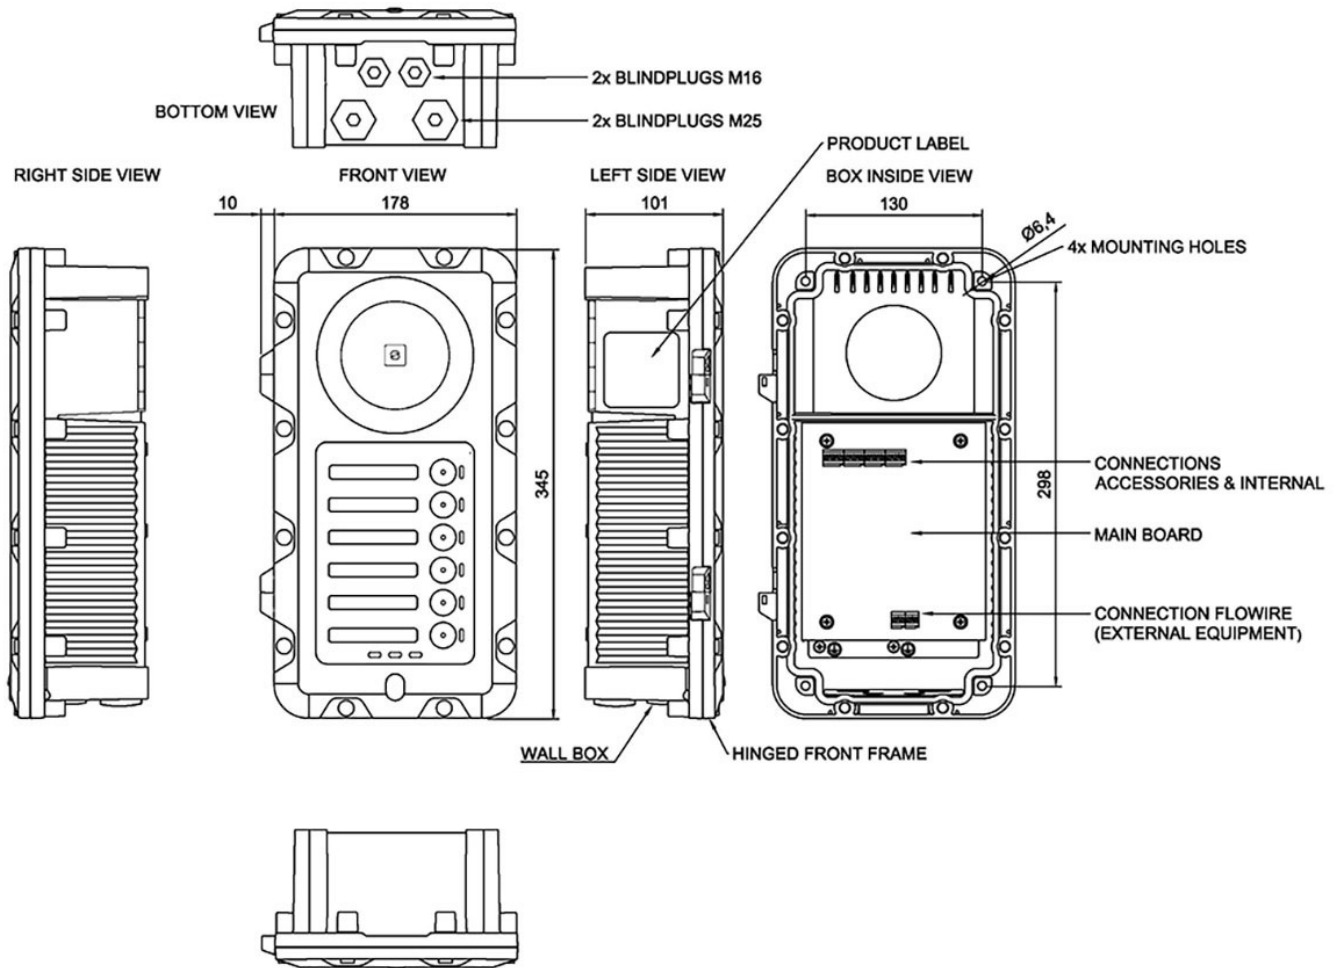

18.09.2017

page 3/4

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Vingtor-Stentofon products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend. Zenitel - All rights reserved.

ACCESSORIES

				
AK5850HS	TAX-2B	TAX-3	EMMAX-1H	FCDC2
Item number: AK5850HS	Item number: 1008150025	Item number: 1008150030	Item number: 1023533511	Item number: 1008080210
				
POWERBOX PSU, 24V DC, 120W	POWERBOX PSU, 24V DC, 250W			
Item number: 2990102120	Item number: 2990102240			