

ES2020RE


Sirena adresabila de incendiu cu flash protocol ENEA

Specificatii tehnice



- Alimentare: 18 - 30V
- Consum stand-by: 200 μ A
- Consum maxim: 10 - 40mA (in functie de tonul selectat)
- 14 tonuri disponibile
- Nivel sunet @1m: 71-101dB(A) (ajustabil)
- Flash inclus
- Protocol ENEA
- Temperatura functionare: -10° C+55° C
- Umiditate: $\leq$ 75%
- Grad protectie: IP65 (IP21, EN54-3 certificat)
- Izolator de bucla inclus (EN54-17)
- Clasa de mediu A (utilizat in interior)
- Instalare: apparent
- Dimensiuni: 121x121x57 mm
- Greutate: 150g
- Posibilitate de mascare a ariei de detectie pentru aplicatii Pet immunity

Dimensiuni

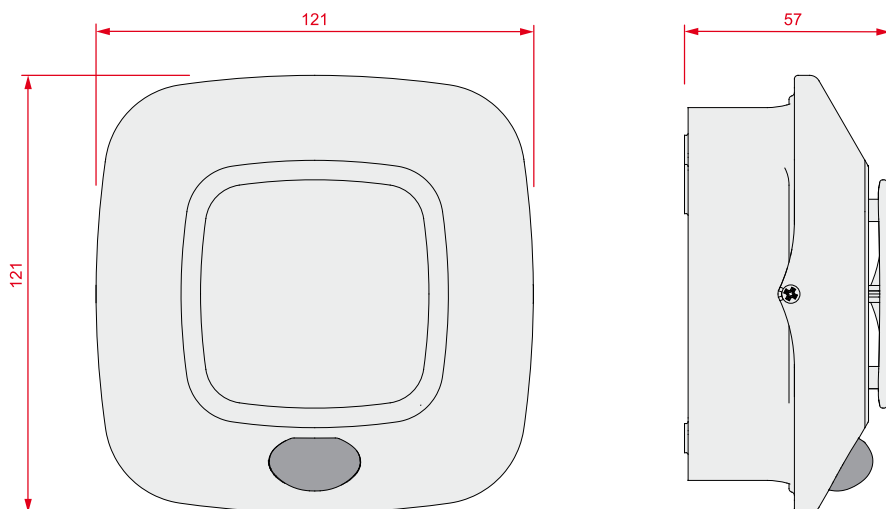

Tonuri

N°	Name	Description	Sound level @1m		Absorption (mA)			EN54-3 approved
			min	max	tone	tone + low level flash	tone + high level flash	
0	Silence		0	0	0	0	0	
1	ISO 8201 2800Hz	2800Hz, (0.5sec ON / 0.5sec OFF) x3 / 1sec OFF	88	101	25	35	40	✓
2 (default)	ISO 8201 1000Hz	1000Hz, (0.5sec ON / 0.5sec OFF) x3 / 1sec OFF	71	89	12	18	25	✓
3	1KHz/800Hz 2Hz	(1000Hz + 800Hz) x 0.5sec	71	89	12	18	25	
4	NEN 2575:2000 (Dutch slow whoop)	(500Hz + 1200Hz) x 3.5sec / 0.5sec OFF	81	92	12	18	25	✓
5	SIN 1000Hz	1000Hz	71	89	12	18	25	
6	SIN 2800Hz	2800Hz	88	101	12	18	25	
7	Fast whoop (AS1670)	(500Hz + 1200Hz) x 0.5sec / 0.5sec OFF	78	89	12	18	25	✓
8	1000Hz 1sON/1sOFF	1000Hz, 1sec ON / 1sec OFF	71	89	12	18	25	
9	800Hz 0.2/1s	800Hz, 0.2sec ON / 1sec OFF	71	89	12	18	25	
10	800-1KHz 1Hz	(800Hz + 1000Hz) x 1sec	71	89	12	18	25	
11	AFNOR NF S 32 001	550Hz, 0.1sec / 440Hz, 0.4sec	74	84	10	15	23	✓
12	AS 1670 Alert	420Hz, 0.625sec ON / 0.625sec OFF	73	83	10	15	23	✓
13	AS1670 Evacuation	((500Hz + 1200Hz) x 0.5sec / 0.5sec OFF) x3 / 1.5sec OFF	78	89	12	18	25	✓
14	DIN 33 404	(1200Hz + 500Hz) x 1sec	80	90	15	20	28	✓

Conexiuni

