

GJD360


Detector dual de exterior (PIR+MW) cu element PIR quad D-TECT DUAL

Specificatii tehnice


- Raza detectie: 10m, 20m, 30m programabila
- Unghi acoperire: 10° - 70° (ajustabil)
- Acoperire: 30m x 30m max
- Ajustare: 180° pan + 90° tilt
- Inaltime instalare: pana la 6m (optima 3m)
- Lentila Fresnel: 28 zone pentru fiecare pereche Pyro
- Posibilitate mascare pentru aplicatii PET Immunity
- Indicatoare: LED verde (MW); LED rosu (PIR); LED albastru (alarma)
- Frecventa microunde: 10.525Ghz
- Iesiri: N/O ; N/C ; Tamper
- Alimentare: 9-15 Vcc
- Consum: 15 mA
- Walktest cu indicator LED
- Carcasa: aliaj zinc rezistenta la impact
- Grad protectie: IP 65
- Temperatura: -20° C+55° C
- Dimensiuni: 145x120x115 mm
- Greutate: 770g



Dimensiuni

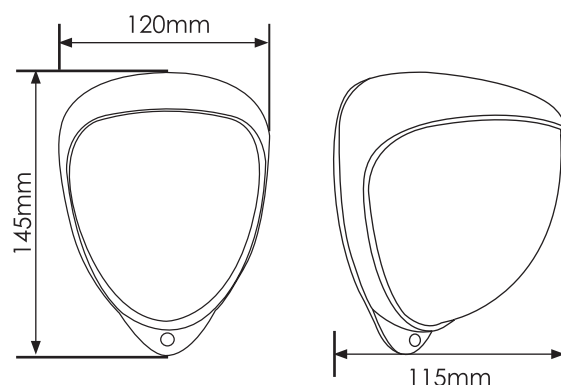



Acoperire

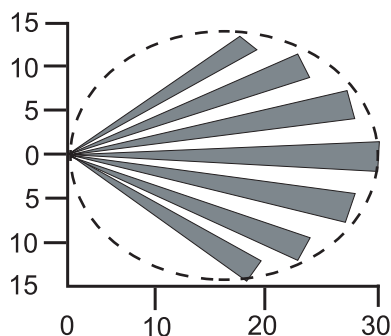

SETARE PENTRU ACOPERIRE MAXIMA


ACOPERIRE MAXIMA

INALTIME 3 METRI
DISTANTA MAXIMA
TILT 0 GRADE

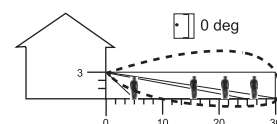

IMUNITATE ANIMALE

INALTIME 1.5 METRI
DISTANTA MAXIMA
TILT -2 GRADE

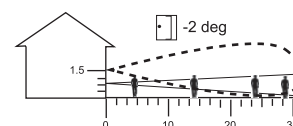

ACOPERIRE PERDEA

INALTIME 6 METRI
DISTANTA MAXIMA
TILT 45 GRADE

